

JTR-MF7523/PHA/364/0915/E


2 or 3 Needle Jeans Pocket Hemming Automat (Chainstitch)



TIMESAVING			
TIME MANUEL METHOD	TIME AUTOMATED METHOD	TIMESAVING PERCENT	
6SEC	2SEC	67%	
ADDITIONAL BENEFITS			
HIGH EFFICIENCY	STANDARD QUALITY	CONSISTENCY	SPEED
✓	✓	✓	✓

Highlights

- Excellent chainstitch quality
- Operator friendly LCD touchscreen
- Special hemming attachment provides 9 to 14 mm hemming marge
- Step motor controlled special belt transport system adjustable for fine or thick material
- Photocell controlled thread trimming system
- Three needle chainstitch sewing head with standard 6,4 mm gauge
- Optionally, needle gauge can be chosen as: 4,8; 7,2 mm
- Special rotating stacker system for the sewn pockets
- Height adjustable work place
- Servo motor technology
- Capacity: 15.000 - 18.000 pcs / 8 hour
- Wide folder attachment between 18 - 24 mm (optional)

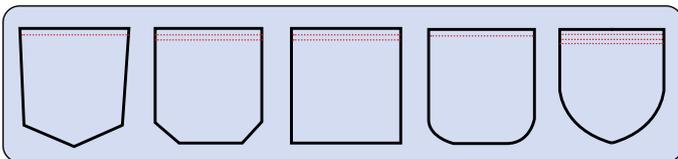

TECHNICAL SPECIFICATION	
Machine Head (Standard)	Juki MF7523C11
Motor	Direct Drive
Max. Sewing Speed	3.500 spm
Capacity	15.000 - 18.000 pcs / 8 hrs
Daily Piece Counter	Available
Thread Breakage Detection	Available
Hemming Size	9 mm - 14 mm
Max. Stitch Lenght	3 mm - 4.5 mm
Needle Type	UY128GAS/NM100-NM140
Power Requirement / Power Consumption	Single-phase 220V / 50 - 60 hz
Compressed Air / Air Consumption	6 Bar

