

JUKI

MO-6800D Series

Semi-dry-head, High-speed, Overlock / Safety Stitch Machine



JUKI's dry-head technology protects
the sewing products from oil stains.



MO-6814D

MO-6800D

Semi-dry-head, High-speed, Overlock / Safety Stitch Machine

MO-6800D Series

This model of sewing machine has been developed while inheriting JUKI's advanced "dry" technology. JUKI is happy to launch the product which responds to customers' concern about oil stains on the fabric.


JUKI's dry technology has been adopted for the MO-6800S which produces seams of delicate quality and feel as well as achieves excellent cost-effectiveness. This is a semi-dry head overlock machine with the dry mechanism which eliminates oil-splashing problem. As a result, oil stains on the sewn products are eliminated.

Oil stains on the sewing product are eliminated.

- Oil splashes are substantially reduced to eliminate oil stains on sewing products, thereby upgrading the finished quality.
- The frequency of stain removal or re-sewing is reduced.
- The machine achieves a practical maximum sewing speed of 7,000sti/min.

Cutting-edge dry technology for achieving a lubrication-free mechanism.

- The needle bar mechanism and upper looper mechanism have been re-designed to require no lubrication.
- The most-advanced dry technologies, such as the special surface treatment applied to the major drive unit and the grease feeding method, contribute to higher durability. The machine does not splash oil after a long-period of use. The grease filler openings are newly provided for the sewing machine on two locations, i.e., one on the upper looper component and the other on the sewing machine frame, thereby improving maintainability.

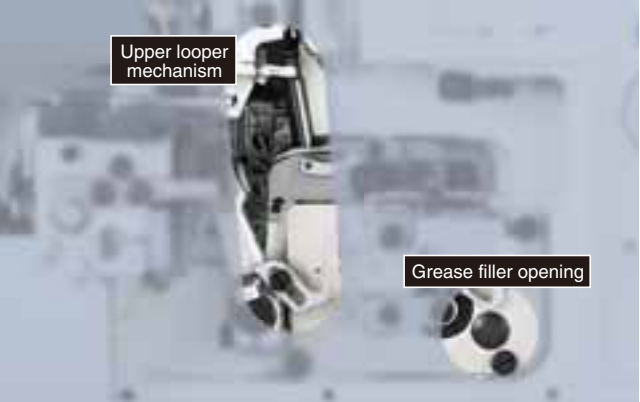

DEVICES AND ATTACHMENTS

Model	Part No.	Description
-------	----------	-------------

Chain-off thread trimming device

T053	70000081	Pneumatic flat cutter
T054	70000082	Pneumatic side cutter (for overlock machine)

Pneumatic chain-off thread suction device

MC904 / MC907	70000083 / 70000102	Specific to chain-off thread, pedal-operated clutch motor / servo motor
MC905 / MC908	70000084 / 70000103	MC904 / MC907 + Air type auto-lifter clutch motor / servo motor
MC906 / MC909	70000085 / 70000104	Pneumatic chain-off thread + cloth chips clutch motor / servo motor
MC910 / MC911	70000106 / 70000107	MC906 / MC909 + Air type auto-lifter clutch motor / servo motor

[Reference]

Combination table of "chain-off thread suction device" and "auto-lifer" which correspond to "chain-off thread trimming device".

Chain-off thread trimming device	Chain-off thread suction device	Auto-lifter
T053 or T054	MC904 / MC907	Clutch motor / servo motor
	MC905 / MC908	Air type auto-lifter clutch motor / servo motor
	MC906 / MC909	Clutch motor / servo motor
	MC910 / MC911	Air type auto-lifter clutch motor / servo motor

Model	Part No.	Description
-------	----------	-------------

Gathering device

S206	70000089	Swing-type gathering device (interlocked with pedal / for overlock machine)
S207	70000090	Swing-type gathering device (interlocked with pedal / for safety stitch machine)(DF6)
S208	70000091	Swing-type gathering device (interlocked with pedal / for safety stitch machine)(FF6)

The attachment opens with the presser foot pedal. This facilitates material setting on the machine. Furthermore, knee-control type differential-feed adjusting device is built in the attachment. It controls a differential-feed ratio as desired, thereby enabling the operator to make beautiful gathers.

Guide, tape guide

H253	40159861	Cloth edge guide ruler (for overlock machine)
H254	40159862	Cloth edge guide ruler (for safety stitch machine)
Q143	40159863	Tape guide

A swing type edge guide.

This attachment is used attached on the machine head (face plate). It is used for tapes with the width of 7mm or less.

Feller, Binder

N080	70000095	Reinforcement tape attachment binder
------	----------	--------------------------------------

This binder binds the edge of a pocket bag while cutting round its periphery.

Option

—	40159749	Micro-lifter
R040	70000098	Tape holder
Z065	70000092	Square upper knife (for overlock machine)
Z067	70000093	Square upper knife (for safety stitch machine)

The micro-lifter is suited to fine adjustments of the lifting amount of the presser foot so as to prevent puckering.

Table-mounting type tape folder

SUBCLASS MACHINE LIST

Seams	Model No.	Materials	Number of needles	Number of threads	Needle gauge (mm)	Overedging width	Number of feed dog rows	Stitch length (mm)	Bottom differentialfeed ratio	Presser lifting amount (mm)	Needle system	Max sewing speed (sti/min)	Remarks
-------	-----------	-----------	-------------------	-------------------	-------------------	------------------	-------------------------	--------------------	-------------------------------	-----------------------------	---------------	----------------------------	---------

[1-needle overlock]

For runstitching in general fabric



	MO-6804D-0E4-30H	L~M	1	3	—	4.0	2	3.8	1:0.7~1:2	6.0	DCx27 #11	7,000	
--	------------------	-----	---	---	---	-----	---	-----	-----------	-----	-----------	-------	--

[2-needle overlock]

For runstitching in general fabric



	MO-6814D-BD6-30H	L~M	2	4	2.0	3.0	3	3.8	1:0.7~1:2	5.5	DCx27 #11	7,000	
	MO-6814D-BE6-40H	M~H	2	4	2.0	4.0	3	3.8	1:0.7~1:2	7.0	DCx27 #11	6,500	
	MO-6814D-BB6-30P	L~M	2	4	2.0	2.0	3	3.8	1:0.7~1:2	5.0	DCx27 #11	7,000	Anti-material-slip
	MO-6814D-BE6-30P		2	4	2.0	4.0	3	3.8	1:0.7~1:2	5.0	DCx27 #11	7,000	

For tape attaching

G44: Tape attaching presser foot Q143: Tape guide



	MO-6814D-BD6-24H/ G44/Q143	L~M	2	4	2.0	3.0	3	3.8	1:0.7~1:2	5.5	DCx27 #9	7,000	
	MO-6814D-BE6-24H/ G44/Q143		2	4	2.0	4.0	3	3.8	1:0.7~1:2	5.5	DCx27 #9	7,000	
	MO-6814D-BE6-34H/ G44/Q143		2	4	2.0	4.0	3	3.8	1:0.7~1:2	5.5	DCx27 #11	7,000	
	MO-6814D-BE6-44H/ G44/Q143	M~H	2	4	2.0	4.0	3	3.8	1:0.7~1:2	7.0	DCx27 #14	6,500	

[Safety stitching]

For runstitching in general fabric



	MO-6816D-DE4-30H	L~M	2	5	3.0	4.0	2	3.8	1:0.7~1:2	5.5	DCx27 #11	7,000	
	MO-6816D-DE4-30H/ E35	L~M	2	5	3.0	4.0	2	3.8	1:0.7~1:2	5.5	DCx27 #11	7,000	
	MO-6816D-FF6-50H	M~H	2	5	3.0	5.0	3	3.8	1:0.7~1:2	7.0	DCx27 #16	6,500	
	MO-6816D-DE4-30P	L~M	2	5	3.0	4.0	2	3.8	1:0.7~1:2	5.0	DCx27 #11	7,000	Anti-material-slip

[3-needle safety stitching]



	MO-6843D-1D6-40H	M~H	3	6	5.0+2.0	3.0	3	3.8	1:0.7~1:2	5.5	DCx27 #11	7,000	
--	------------------	-----	---	---	---------	-----	---	-----	-----------	-----	-----------	-------	--

*"sti/min" stands for "Stitches per Minute." *Contact your JUKI distributor for gauge sizes and other information when you place your order.

Sewn product pictogram

UNDER SHIRTS	T-SHIRTS	TROUSERS	ONE-PIECE	SKIRT	DRESS SHIRTS	BLOUSE	POLO SHIRTS	JUMPER	SPORTS WEAR	PAJAMA	KNIT SHIRTS	KNIT WEAR	SUIT	COAT	JEANS	HANKERCHIEF	SCARF

JUKI ECO PRODUCTS

The MO-6800D is an eco-friendly product which complies with JUKI ECO PRODUCTS standards for protecting the environment.



- The sewing machine complies with the "Juki Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive.

For details of JUKI ECO PRODUCTS, refer to: http://www.juki.co.jp/eco_e/index.html

*The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment. The Juki Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment.

■ SPECIFICATIONS

*"sti/min" stands for "Stitches per Minute "

■ WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:

Material		Application	Special machine	Code
Light- to medium-weight	Specific to knits	Tape attaching	Standard	24H
	For general fabrics	Runstitching	Standard	30H
		Tape attaching	Standard	34H
		Runstitching	Anti-material-slip	30P
Medium- to heavy-weight	Specific to knits such as sweaters	Runstitching	Standard	40H
		Tape attaching	Standard	44H
	Medium- to heavy-weight materials such as denim	Runstitching	Standard	50H



2-11-1, TSURUMAKI, TAMA-SHI,
TOKYO 206-8551, JAPAN
PHONE : (81) 42-357-2370
FAX : (81) 42-357-2274
<http://www.juki.com>

MARCH, 2016 Printed in Japan (TN)